


## Non-Woven Quick-Strip Discs



Non-Woven Quick-Strip discs are used to clean, strip rust, paint or carbon from a wide range of surfaces.

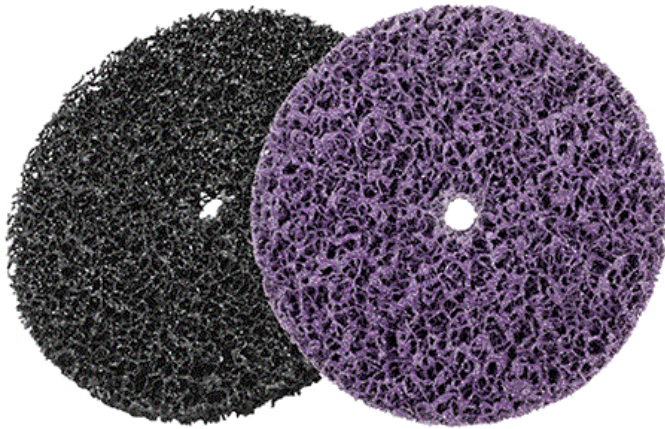

### Safety



Flap Discs perform best between 50-80m/s, this giving the optimum balance between stock removal, surface finish, cutting temperature and life.

**NB! Excess speed is dangerous and may result in the disc disintegration, grain shedding and overheating.**

**NEVER USE FLAP DISCS AT SPEEDS IN EXCESS OF 80m/s.**

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.


Diameter	Maximum Speed rpm	Maximum Speed m/s
50mm	7600	15000
75mm	5100	10000
100mm	3800	7500
150mm	2500	5100
180mm	5000	4800

### Standard Sizes

Size	Hole	Velcro	Black	Purple
50mm	●		●	●
75mm	●		●	●
100mm	●		●	●
150mm	●		●	●
180mm		●	●	●



Velcro Hook Disc

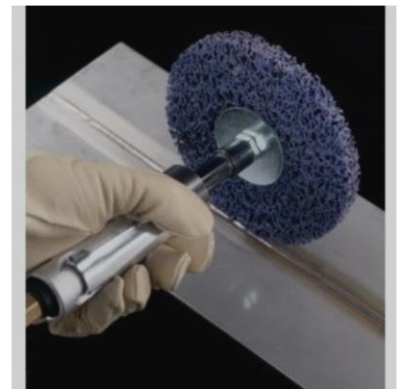

Disc Mandrels

Mandrels are available to be used in a hand tool



Mini Spindle Wheel



For Quick-Strip Flap Disc and Quick-Loc disc please refer to Pg 32 and Pg 31 respectively