

Felt Polishing Products

Felt is assembled into various different finished products to be used to achieve a high gloss buffed finish.

Used in conjunction with either liquid or solid polishing compounds felt products can be used on a variety of materials.

Polishing compounds should be selected based on the desired finish and the type of material being polished.



Safety




Felt polishing products perform best between 10-20m/s, this giving the optimum balance between , surface finish, temperature and product life.

NB! Excess speed is dangerous and may result in disintegration and overheating.

NEVER USE FLAP DISCS AT SPEEDS IN EXCESS OF 25m/s.

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.

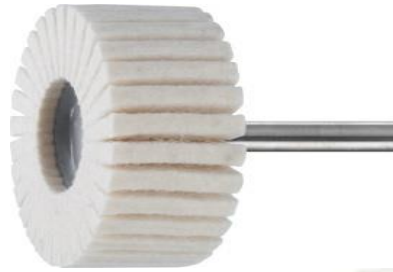

Felt Flap Wheel

Diameter	Width	Pin
150	25	Y80xH25 or H40
150	50	Y80xH25 or H40
200	25	Y100xH25/ Y125xH67
200	50	Y100xH25/ Y125xH67
250	50	Y125xH67

Spindle Mounted Wheels

Diameter	Width	Pin
50	6	6
50	12	6
75	6	10
75	12	10
100	12	12
150	12	25
200	12	25


Felt Solid Wheels

Diameter	Width	Pin
40	20	6
40	30	6
50	30	6
80	40	6
80	50	6



Felt Flap Discs

Diameter	Felt Width	Type
115	3mm	Flat
115	6mm	Flat
115	3mm	Flap



Felt Quick-Loc Discs

Diameter	Felt Width	Type
50	6mm	PM or MF
75	6mm	PM or MF