


Propeller & Slotted Discs



Propeller & Slotted discs are ganged, locked together and used to grind and sand in tight spaces.

Made from J-weight, X-weight or Y-weight abrasive cloth depending on the application and aggression required.

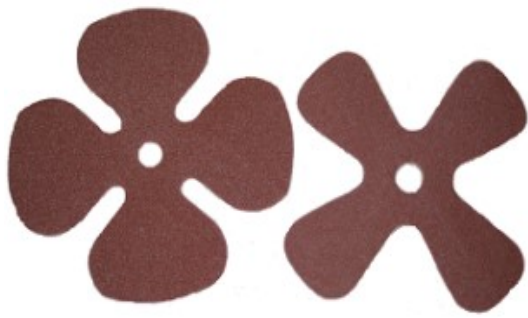

Safety



Propeller & Slotted discs perform best between 10-20m/s, this giving the optimum balance between stock removal, surface finish, cutting temperature and life.

NB! Excess speed is dangerous and may result in disc disintegration, grain shedding and overheating.

NEVER USE PROPELLER & SLOTTED DISCS AT SPEEDS IN EXCESS OF 30m/s.

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.



Standard Sizes Available

Dia	Bore	Type	Mod.
50mm	10mm/M5	Lock	Slotted
100mm	10mm/M5	Lock	Slotted
150mm	16mm	Wide Wing	Prop
180mm	16mm	Narrow Wing	Prop
180mm	16mm	Wide Wing	Prop



Mandrels
M5 to 6mm Mandrel

Standard Grit Sizes

Grit Size	J-Weight	X-Weight	X-Weight	Y-Weight
	Alo.	Alo.	Zir.	Zir.
P60	•	•	•	•
P80	•	•	•	•
P120	•	•	•	•
P150	•		•	
P180	•		•	
P240	•		•	
P320	•		•	
P400	•		•	
P600			•	