


## Resin Fiber Discs



Resin Fiber Discs are used for grinding, dressing, deburring, polishing and blending of all kinds of surfaces and welds.

Not only do we supply standard round Resin Fiber discs but we are also able to press them out into a range of specialized shapes.

- Octagonal
- Rosette
- Clove
- Rose
- AVO (Always Visible Operation)

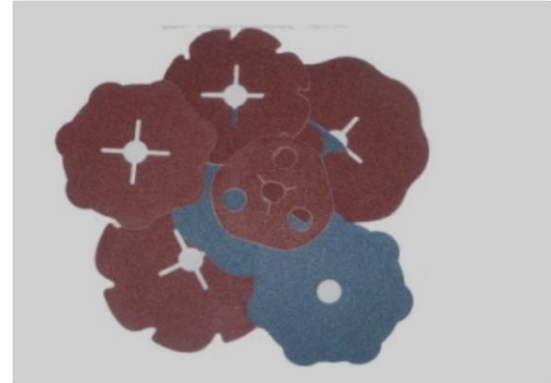

### Safety



Flap Discs perform best between 50-80m/s, this giving the optimum balance between stock removal, surface finish, cutting temperature and life.

**NB! Excess speed is dangerous and may result in the disc disintegration, grain shedding and overheating.**

**NEVER USE FLAP DISCS AT SPEEDS IN EXCESS OF 80m/s.**

Do not use wet or in any coolant or oil.

Use in accordance to ANSI B7.1.

Diameter	Maximum Speed rpm	Maximum Speed m/s
100mm	15300	80
115mm	13300	80
125mm	12200	80
150mm	8500	80
178mm	5300	80

### Standard Abrasive Descriptions

Diameter	Std Alox Brown
Alox Brown	Brown Disc. Aluminum Oxide
Zir Blue	Blue Disc. Zirconium
Std Zir Green	Green Disc. Zirconium with cooling Top Size
Std Ceramic Orange	Orange Disc. Ceramic with colling Top Size



### Combinations Available per Size

Diameter	Standard Round	Octagonal	Rosette	Clove	Rose	AVO
100mm	●					
115mm	●					●
125mm	●					
150mm	●	●		●		
178mm	●	●	●		●	●

### Fiber Disc Backing Pads

All Std sizes available

